


*Ability to inject and collide in similar optics avoids fill-to-fill thermal cycling*

*Tune excursions from BBI much reduced (less hysteresis!)*

*Turn-around times reduced from 4 to less than 2 minutes.*

March 26, 2005 (3770)

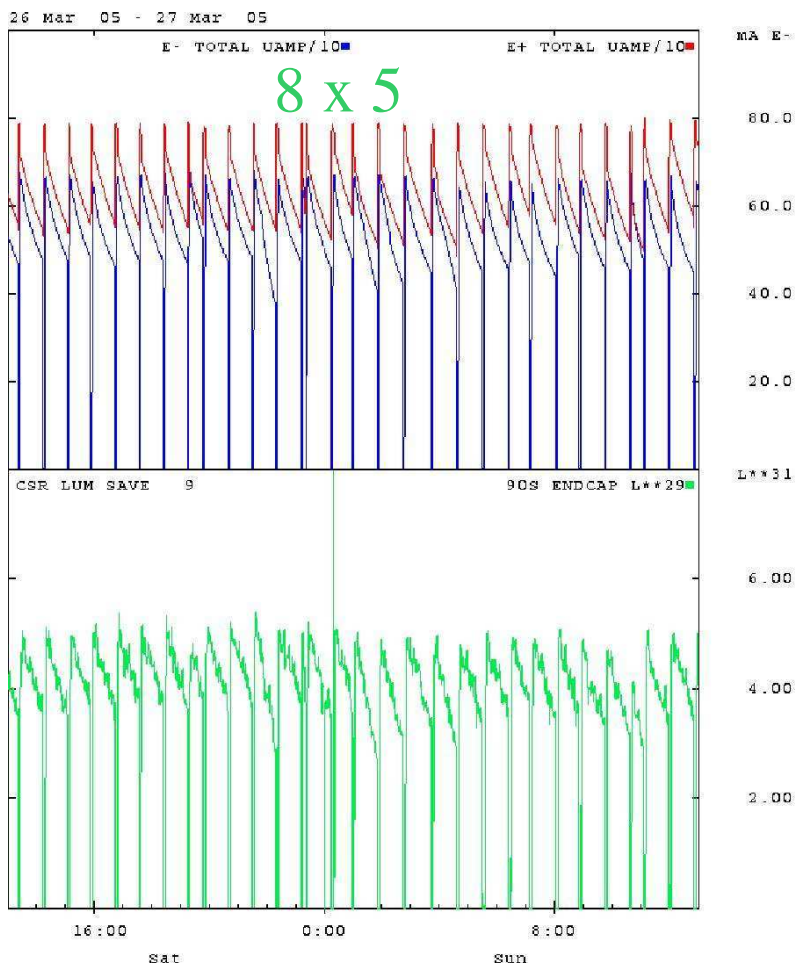

April 8, 2006 (4170)

